


**LIFTING AND  
TRANSPORT EQUIPMENT**

**2022  
2023**

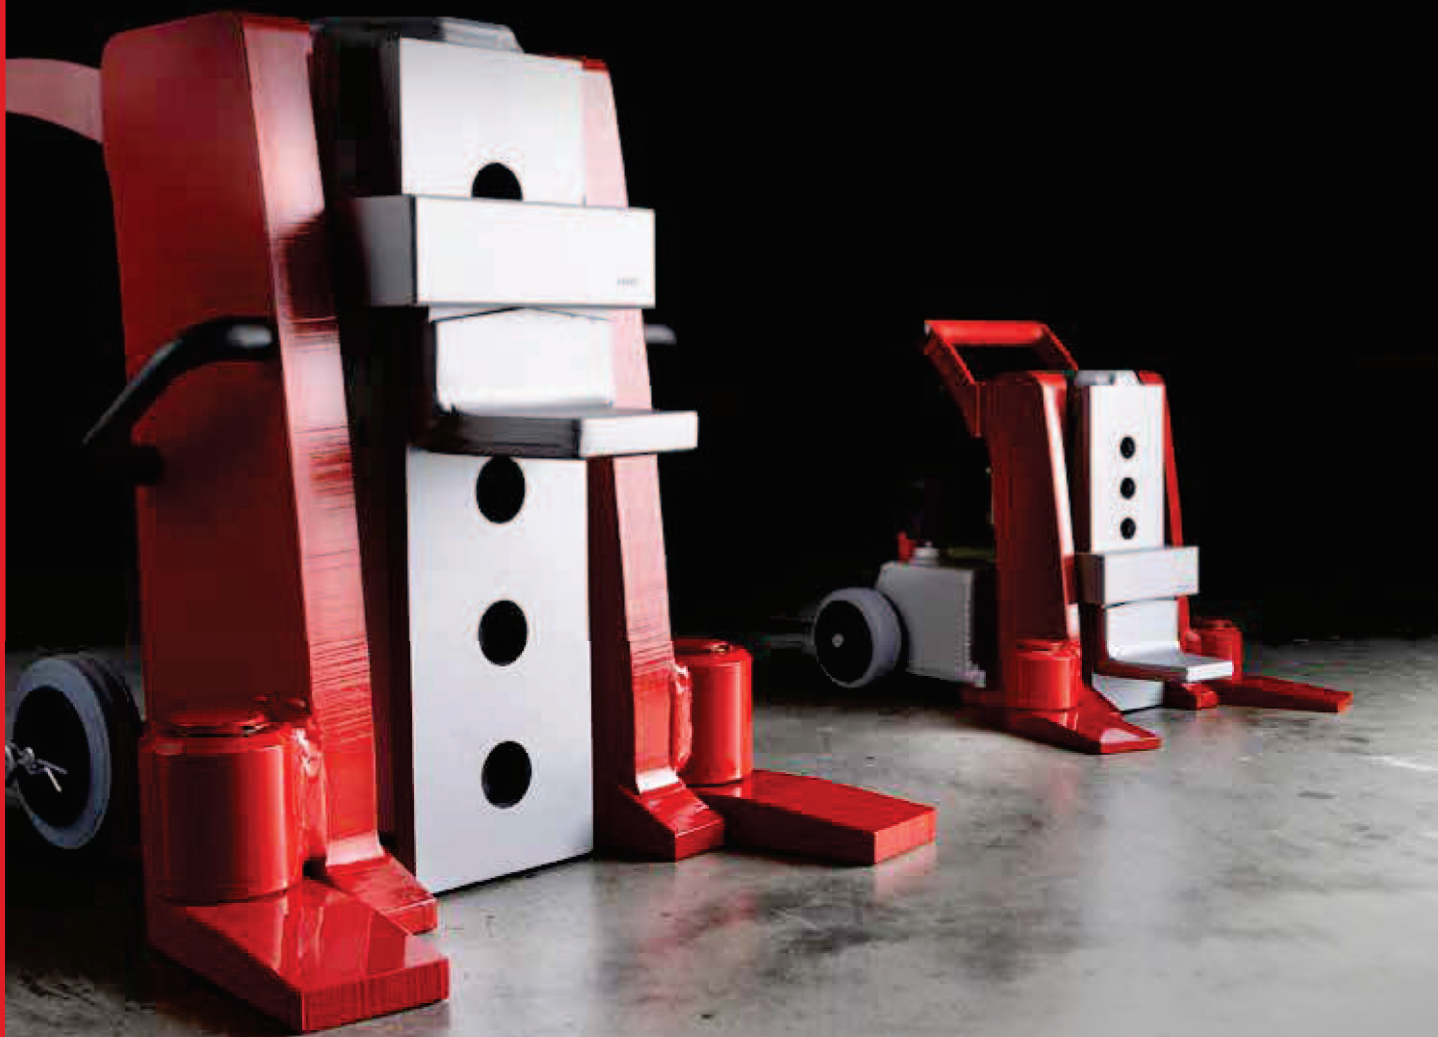

**JUNG**  
●●●  
**JUNG-HEBETECHNIK.DE**

# » THE LIGHT-WEIGHT JACK: JH-G



**Professional solutions. For professionals.**

**SAVE WEIGHT**

Extreme weight reduction by improved construction.

**PATENTED**

Work and lift safely with our patented lifting toe system (Pat.-No. 4413478).

**SECURE AND TEAR RESISTANT**

Swiveling safety toe made from die-forged steel for extreme robustness that prevents fractures. The advanced strength steel is impact resistant and provides optimal safety.

**RELIABLE STURDY**

Sturdy, 180° swivelling feet - for easy and safe positioning in every situation.

**FLEXIBLE**

Removable handle on JH 6 G plus and JH 10 G plus.

**EXPANDABLE**


Available with side handles and/or with standard handle

**LOW COST**

Easy maintenance by single removable pump unit; safety pressure relief valve with dirt filter prevents overloading. Also available without integrated pump unit. See JH G plus series EX version.


**MAXIMUM OUTPUT**


Maximum output due to reduced friction in the lifting track with our patented slide shoe design.

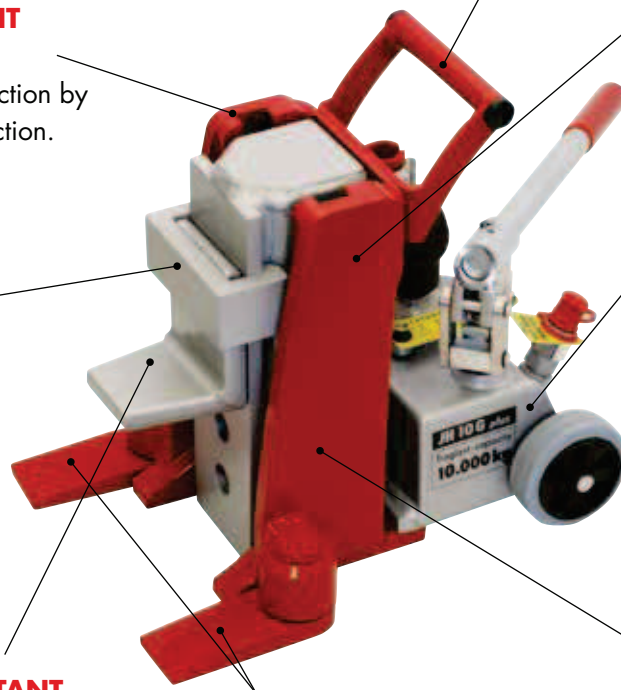

**i** Technical drawings of the respective devices can be found at [jung-hebetechnik.de](http://jung-hebetechnik.de)

» Swiveling lifting toe for safe and optimal adjustment to loads on varying inclines up to +6°.

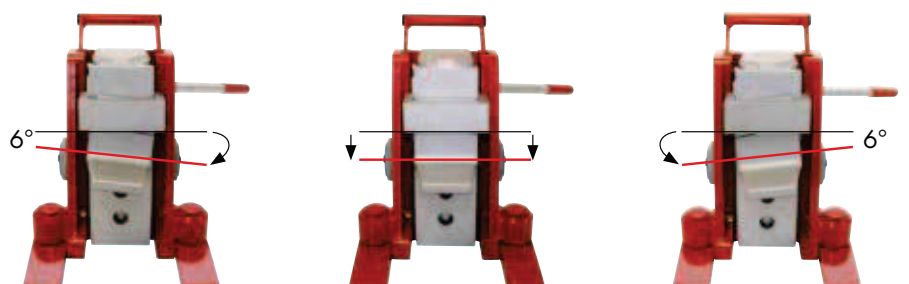


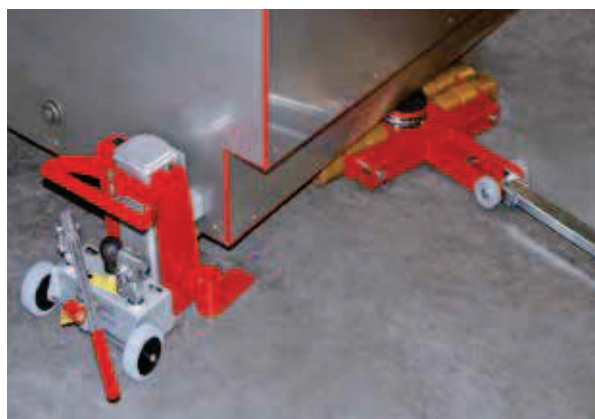

JH 15 G plus in use combined with our JL 9 K



JH 6 G plus with standard handle and side handles  
Right: JH 10 G plus with side handles, without standard handle

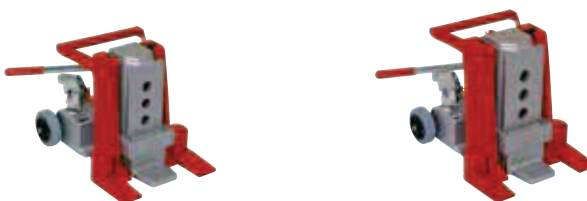

TYPE		■ JH 15 G PLUS		■ JH 20 G PLUS	
Load capacity on top plate		kg	15 000		20 000
Stroke		mm	175		190
Minimum lift toe height	h 1	mm	20		20
Maximum lift toe height	h 2	mm	205		225
Lift toe adjustment	V	mm	5 x 46		5 x 51
Top plate height	H 1	mm	310		340
Toe width front	L b	mm	80		80
Toe depth	n L	mm	66		66
Length feet in front	L 2	mm	415		425
Length feet on side	L 1	mm	401		405
Width	B	mm	300		322
Height	H 2	mm	310		340
Cylinder volume		Liter	0,5		0,73
Weight		kg	48		60
<b>ORDER NO.</b>			■ 01 150 102-G		■ 01 200 102-G